




## **Implant Features**

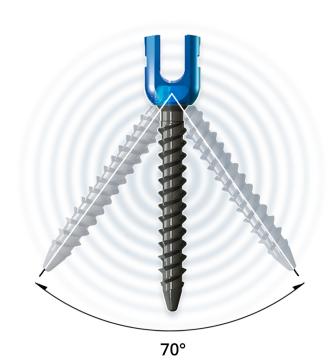

Solid and Cannulated Options

**Mid-Top Screw** 

LENGTH

25-50mm

25-55mm

30-60mm

30-60mm

DIAMETER

4.5

5.5

6.5

7.5

| Low-Top Screw |         |  |  |  |
|---------------|---------|--|--|--|
| DIAMETER      | LENGTH  |  |  |  |
| 4.5           | 25-50mm |  |  |  |
| 5.5           | 25-55mm |  |  |  |
| 6.5           | 30-60mm |  |  |  |
| 7.5           | 30-60mm |  |  |  |

|                 |                 |               | 1                |
|-----------------|-----------------|---------------|------------------|
| Pre-Curved Rods |                 | Straight Rods |                  |
| DIAMETER        | LENGTH          | DIAMETER      | LENGTH           |
| 5.5             | 35-150mm        | 5.5           | 150, 200-500mm   |
|                 | *5mm increments |               | *100mm increment |

## **Low-top Option**

- Low profile
- Polyaxial design
- Dual-lead thread
- Self-tapping



## **Reduction Option**

- 20mm internal
- Breakaway tabs



DC-0134 FPSB-001 REV A